


INSTRUCTIONS

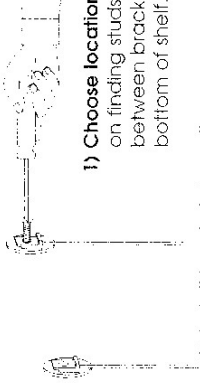

- 1) **Choose locations of brackets**, preferably on wall studs. (see tips on finding studs) and make level marks for screws. (40" max. span between brackets) see angle chart for distance from screw to bottom of shelf.


2) Install brackets to wall.

ON STUD: Pre drill hole, hold wall fitting in place with round back plate as shown & screw in fastener supplied until fittings are tight to wall. (Properly installed: 100 lb. capacity)

HOLLOW WALL: Use 3/16" x 3" toggle bolt. Put toggle bolt through wall fitting & round back plate, install & tighten until fittings are tight to wall. (Properly installed: 75 lb. capacity)
CEMENT OR OTHER: Use proper fasteners.
(Properly installed: 100 lb. capacity)

Back Plate

Wall Fitting

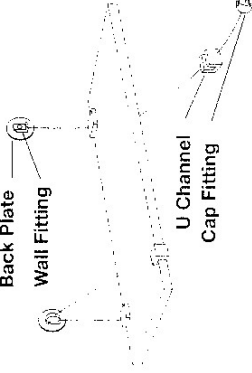

- 3) **Hang shelf.** Put U channels on back and front of shelf as shown, drop cap fitting onto wall fitting (make sure they are properly aligned and fitted) Level shelf (front to back) by pulling cable from below and pushing the shelf down into place.

U Channel

Cap Fitting



NOTE: The peel & stick inserts supplied are used to decrease opening of U channels for use with thinner shelves. Apply them to inside channels before hanging shelf.

PARTS

INCLUDED:

- Pair of Cable Shelf Brackets
- 2 Screws (for installation on stud)
 - Round Back Plates
 - Plastic Inserts

PERFECT SHELVING SOLUTION:

DISPLAY
BOOKS
ENTERTAINMENT EQUIPMENT
CLOSETS & LAUNDRY ROOM
WORKSHOP
OFFICE
ETC.